


# SCENEX LIGHTING

## LED Tape

—GLP—  
**GERMAN LIGHT  
PRODUCTS**

Scenex Lighting distribute a wide range of LED strip solutions. From single color to full RGB color mixing, from indoor to outdoor IP rated solutions and in both flexible and fixed variants, we've got them all.  
Great for set decoration and stage highlights.

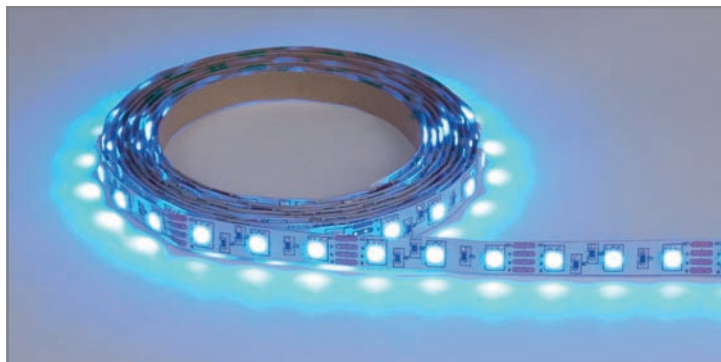

Part Number	50503RGB	50503RGB-60	50505RGB-60
Color	RGB	RGB	RGB
Wavelength	450~630nm	450~630nm	450~630nm
LED's pr mtr / pr strip	30 / 90	60 / 180	60 / 180
LED Type	SMD 5050	SMD 5050	SMD 5050
Field Angle	120°	120°	120°
Backing Color	White/Black	White/Black	White/Black
Protection Rating	IP67	IP67	IP67
Mounting	Adhesive backing	Adhesive backing	Adhesive backing
Wiring connection	4 cable (R,G,B, V+)	4 cable (R,G,B, V+)	4 cable (R,G,B,V+)
Power Voltage	12V	12V	12V
Current pr mtr. / pr strip	7.2W / 21.6W	14.4W / 43.2W	14.4W / 72W
Energy Saving Class	Class A	Class A	Class A
Operating Temp.	23°F to 104°F	5°F to 104°F	23°F to 104°F
Cutting Possibility	Every 3.9 in.	Every 1.9 in.	Every 1.9 in.
Dimensions - Inches	118.1 x 0.4 x 0.1	118.1 x 0.4 x 0.1	196.8 x 0.4 x 0.1

Part Number	50503R-60	50503G-60	50503B-60
Color	Red	Green	Blue
Wavelength	620~625nm	520~525nm	465~470nm
Color Temp	n/a	n/a	n/a
Lumens pr. mtr. / pr strip	480/1440	660/1980	540/1620
LED's pr mtr / pr strip	60 / 180	60 / 180	60 / 180
LED Type	SMD 5050	SMD 5050	SMD 5050
Field Angle	120°	120°	120°
Backing Color	White/Black	White/Black	White/Black
Protection Rating	IP 55	IP 55	IP 55
Mounting	Adhesive backing	Adhesive backing	Adhesive backing
Wiring connection	2 cables (V-, V+)	2 cables (V-, V+)	2 cables (V-, V+)
Power Voltage	12V	12V	12V
Current pr mtr. / pr strip	14.4W / 43.2W	14.4W / 43.2W	14.4W / 43.2W
Energy Saving Class	Class A	Class A	Class A
Operating Temp.	5°F to 104°F	5°F to 104°F	5°F to 104°F
Cutting Possibility	Every 1.9 in.	Every 1.9 in.	Every 1.9 in.
Dimensions - Inches	118.1 x 0.4 x 0.1	118.1 x 0.4 x 0.1	118.1 x 0.4 x 0.1



DMX & InfraRed  
Control Options



\* Yellow not included in table but also available

**GLP German Light Products, Inc.**  
10945 Pendleton Street  
Sun Valley, CA 91352  
Tel: 818.767.8899  
Fax: 818.279.9898

[www.germanlightproducts.com](http://www.germanlightproducts.com)  
[info@germanlightproducts.com](mailto:info@germanlightproducts.com)

# SCENEX LIGHTING

## LED Tape

# GLP

## GERMAN LIGHT PRODUCTS

Scenex Lighting distribute a wide range of LED strip solutions.  
From single color to full RGB color mixing, from indoor to outdoor IP rated solutions and in both flexible and fixed variants.  
Great for set decoration and stage highlights.



Part Number	50503WW-60	50503WW	50505WW
Color	Warm White	Warm White	Warm White
Wavelength	n/a	n/a	n/a
Color Temp	2800K-3200K	2800K-3200K	2800K-3200K
Lumens pr. mtr. / pr strip	720 / 2160	360 / 1080	360 / 1800
LED's pr mtr / pr strip	60 / 180	30 / 90	30 / 150
LED Type	SMD 5050	SMD 5050	SMD 5050
Field Angle	120°	120°	120°
Backing Color	White/Black	White/Black	White/Black
Protection Rating	IP 55	IP 55	IP 55
Mounting	Adhesive backing	Adhesive backing	Adhesive backing
Wiring connection	2 cables (V-, V+)	2 cables (V-, V+)	2 cables (V-, V+)
Power Voltage	12V	12V	12V
Current pr mtr. / pr strip	14.4W / 43.2W	7.2W / 21.6W	7.2W / 36W
Energy Saving Class	Class A	Class A	Class A
Operating Temp.	5°F to 104°F	23°F to 104°F	23°F to 104°F
Cutting Possibility	Every 1.9 in.	Every 3.9 in.	Every 3.9 in.
Dimensions - Inches	118.1 x 0.4 x 0.1	118.1 x 0.5 x 0.1	196.8 x 0.47 x 0.1

Part Number	50503CW-60	50503CW	50505CW
Color	Cold White	Cold White	Cold White
Color Temp	6500K-7000K	6500K-7000K	6500K-7000K
Lumens pr. mtr. / pr strip	840 / 2520	420 / 1260	420 / 2100
LED's pr mtr / pr strip	60 / 180	30 / 90	30 / 150
LED Type	SMD 5050	SMD 5050	SMD 5050
Field Angle	120°	120°	120°
Backing Color	White/Black	White/Black	White/Black
Protection Rating	IP 55	IP 55	IP 55
Mounting	Adhesive backing	Adhesive backing	Adhesive backing
Wiring connection	2 cables (V-, V+)	2 cables (V-, V+)	2 cables (V-, V+)
Power Voltage	12V	12V	12V
Current pr mtr. / pr strip	14.4W / 43.2W	7.2W / 21.6W	7.2W / 36W
Energy Saving Class	Class A	Class A	Class A
Operating Temp.	5°F to 104°F	23°F to 104°F	23°F to 104°F
Cutting Possibility	Every 1.9 in.	Every 3.9 in.	Every 3.9 in.
Dimensions - Inches	118.1 x 0.4 x 0.1	118.1 x 0.5 x 0.1	196.8 x 0.47 x 0.1



Dimming and switching power supplies available.

**GLP German Light Products, Inc.**  
**10945 Pendleton Street**  
**Sun Valley, CA 91352**  
**Tel: 818.767.8899**  
**Fax: 818.279.9898**

[www.germanlightproducts.com](http://www.germanlightproducts.com)  
[info@germanlightproducts.com](mailto:info@germanlightproducts.com)