


F32

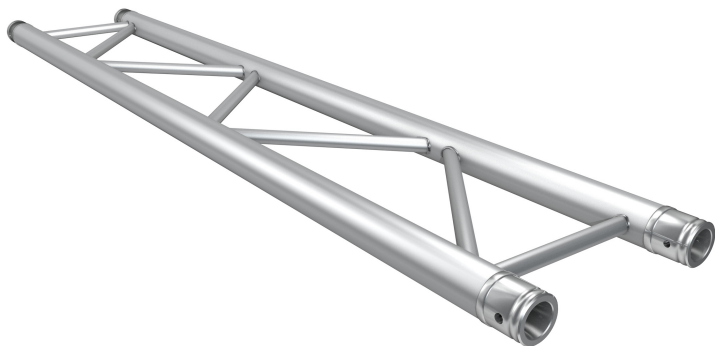

The Cosmic Truss F32 is a 2 point truss system, providing optimum volume and carrying capacity.

F32 can be used in a variety of applications but comes into its own in smaller constructions, such as trade shows.

Technical Data

Pipe diameter: 1.96"
 Wall thickness: 0.08"
 Material: Al MgSi F31 / T6082
 Connectors: Included
 TÜV Nord cert.: Yes
 DIN: 4113,4113-3,13814



Span	Uniform distribution load	Deflection	Center point load	Deflection	Third point load	Deflection
Feet	Pounds/foot	Inches	Pounds	Inches	Pounds	Inches
6.6	414.6	0.3	2736.4	0.3	2050.4	0.3
9.8	122.7	0.7	1807	0.6	1357.1	0.7
13.1	51.2	1.3	1342.4	1	1003.1	1.3
16.4	25.6	2	1054.7	1.7	796.6	2
19.7	14.6	2.9	870.3	2.3	649.1	3
23	9	3.9	730.2	3.2	545.8	4
26.2	5.9	5.2	619.6	4.2	464.7	5.3
29.5	4	6.5	538.4	5.4	405.7	6.7
32.8	3	3.3	464.7	6.7	3.5	8.2



@cosmictruss

