DATA SHEET

SCENE

Scenic LED

18 RGBW LED Puck



Specifications:

Item: 65mm LED Puck Input voltage: DC24V

Power: 4.5W

Light source: 18 x 5050 SMD RGBW IC chip VSC 2909

Diameter: 65mm CRI: >80 IP Rating: IP66

Cover type: Clear Beam angle: 145°



Scenex Lighting has its heart in creating beautiful scenic lighting elements, and its head in the practical solutions of taking these often delicate items into the real world of entertainment lighting applications.

From the toughest concert touring schedules to fast assembly items for quick change events, and the consistency of long running shows that need identical performance from the very first to the very last show, Scenex Lighting has it covered.

Our solutions comprise not just the lighting elements themselves but also the control and the systems that make them work in a practical and affordable format. We back this up by years of experience and knowledge from our staff who are the heads behind developing so many of our products. If we've done it, then we know how to solve it, and we are happy to share our experience.

The full range of Scenex Lighting offer practical, affordable and reliable solutions to your LED set lighting needs.

60mm Sphere Surface Mount Marquee LED



Specifications:

Item: 60mm LED Pixel ball Input voltage: DC12V

Power: 1.44W

Light source: 5050 IC chip

UCS1903

Diameter: 60mm

CRI: >80 IP Rating: IP66

Cover type: Rounded opaque

Beam angle: 300°




Tel: 818.767.8899 Fax: 818.279.9898

DATA SHEET

SCENE

Scenic LED

35mm Pixel Dome LED RGB IP67

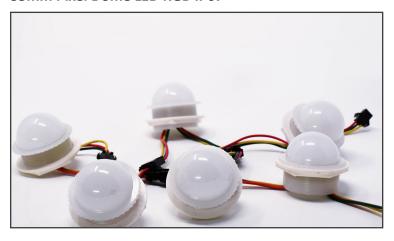

Specifications:

Item: 35mm Pixel Dome Input voltage: DC12V Power: 1.44W

Light source: 9 x 5050 SMD

IC chip: UCS2903

Diameter: 35mm

CRI: >80
IP Rating: IP67

Cover type: Rounded opaque

Beam angle: 180°

LED Tape

Plus a full range of flexible IP rated LED tape with and without pixel control. Check the website for more details.



26mm Pixel Dome LED RGBW IP67



Specifications:


Item: 26mm LED Pixel Dome CRI: >80
Input voltage: DC12V IP Rating: IP67

Power: 1.44W **Cover type:** Rounded opaque or

Light source: 3 SMD 5050 RGBW clear

IC chip: USC1903 Diameter: 26mm Beam angle: 180°

8 x 8 Pixel RGBW Digital Matrix

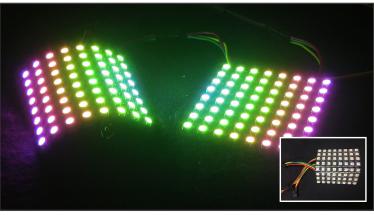

Specifications:

Item:80mm X 80mm LED MatrixIC chip:USC2904Input voltage:DC5VCRI:>80Power:16WIP Rating:IP22Light source:64 SMD 5050Beam angle:120°

RGBW, SK6812



Tel: 818.767.8899 Fax: 818.279.9898