

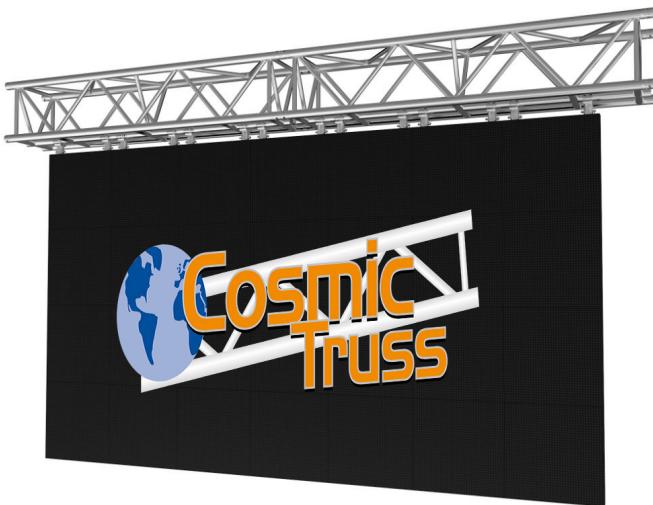




F45

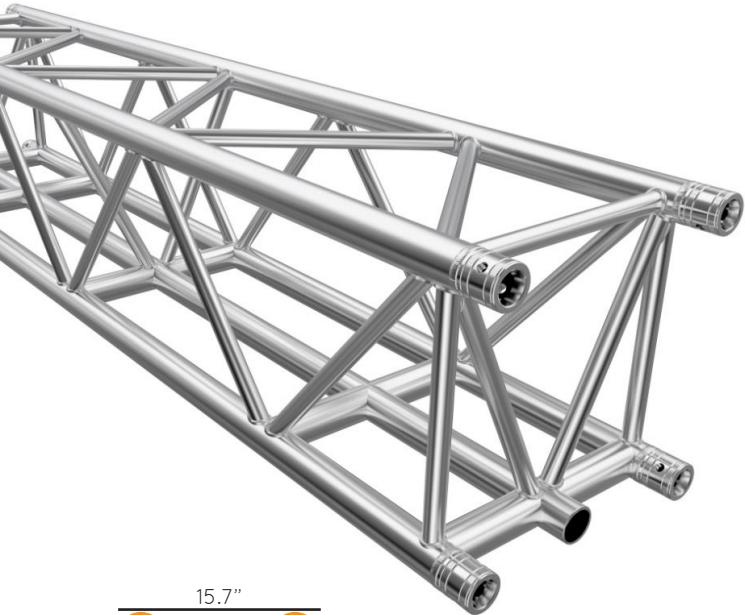


The F45 truss is based on the F44 truss system and is specifically designed for applications with video wall panels. A balanced center rigging point is implemented on the bottom face of the truss.

This allows LED panels to be clamped directly onto the center pipe itself, negating the need to sling or brace across a traditional square truss.

Further horizontal ladder style braces are added to provide extra strength and additional hanging space.


Technical Data

Pipe diameter:	1.96"
Wall thickness:	0.16"
Material:	AlMgSi F31
Connectors:	Included




@cosmicttruss



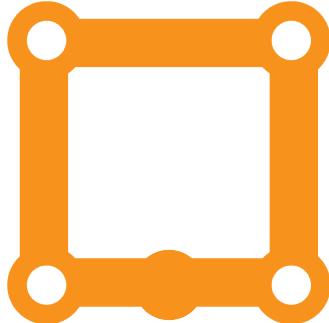

Span Feet	Uniform distribution load Pounds/ft	Deflection Inches	Third point load Pounds	Deflection Inches	Quarter point load Pounds	Deflection Inches
13.1	403	0.2	1103	0.1	1103	0.1
16.4	403	0.4	1103	0.2	1103	0.3
19.7	403	0.8	1103	0.3	1103	0.4
23	318	1.2	1103	0.5	1103	0.7
26.2	245	1.6	1103	0.8	1103	1.1
29.5	194	2.1	1103	1.1	1103	1.5
32.8	157	2.6	1103	1.6	1103	2.1
36.1	129	3.1	1103	2.1	1103	2.8
39.4	108	3.7	1103	2.7	1006	3.4
42.7	91	4.4	1103	3.5	921	4
45.9	77	5.1	1103	4.4	846	4.7
49.2	66	5.9	1049	5.3	780	5.4
52.5	53	6.3	976	6.1	720	6.2

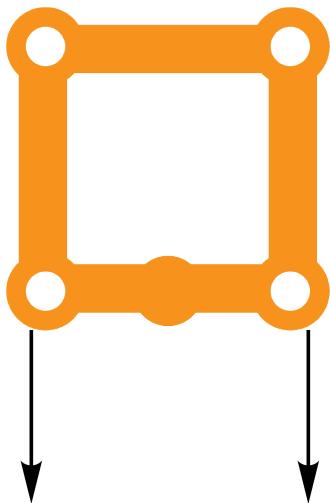

Span Feet	Uniform distribution load Pounds/ft	Deflection Inches	Third point load Pounds	Deflection Inches	Quarter point load Pounds	Deflection Inches
13.1	640	0.3	2994	0.3	2298	0.3
16.4	511	0.5	2631	0.4	2058	0.5
19.7	424	0.9	2330	0.7	1845	0.7
23	318	1.2	2084	0.9	1670	1.1
26.2	245	1.6	1880	1.3	1519	1.4
29.5	194	2.1	1707	1.7	1354	1.8
32.8	157	2.6	1559	2.1	1218	2.3
36.1	129	3.1	1431	2.6	1104	2.8
39.4	108	3.7	1318	3.2	1006	3.4
42.7	91	4.4	1218	3.8	921	4
45.9	77	5.1	1129	4.5	846	4.7
49.2	66	5.9	1049	4.3	780	5.4
52.5	53	6.3	976	6.1	720	6.2



@cosmicttruss

