


Photometrics Pro

Luminaire Photometric Report

- [Evaluation Version]

Filename: impression FR10 BAR-Full-Narrow-Zoom_0
Manufacturer: GLP German Light Products GmbH
Luminaire: impression FR10 BAR
Luminaire Cat: 7683
Lamp Output: 1 lamp, rated Lumens/lamp: 4374
Max Candela: 685,902.3 at Horizontal: 270°, Vertical: 3°
Luminous Opening: Rectangle (L: 6.69", W: 77.17")
Test: 2020-01-30-2
Test Lab: GLP Light Lab
Photometry : Type B
Nema Type: 1 X 1

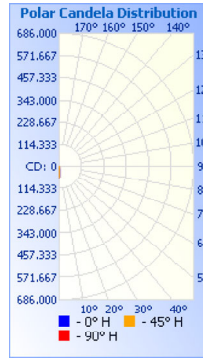

Roadway Summary

Cutoff Classification:	FULL CUTOFF
Distribution:	TYPE I, VERY SHORT
Max Cd, 90 Deg Vert:	0
Max Cd, 80 to <90 Deg:	0
Lumens % Lamp	
Downward Street Side:	2,546.3 58.2%
Downward House Side:	2,280.0 52.1%
Downward Total:	4,826.3 110.3%
Upward Street Side:	0 0%
Upward House Side:	0 0%
Upward Total:	0 0%
Total Lumens:	4,826.3 110.3%

Flood Summary




	Efficiency	Lumens	Horizontal Spread	Vertical Spread
Field (10%):	95.6%	4,181.6	5.9	8.9
Beam (50%):	62.3%	2,726.1	4.3	5.2
Total:	100.9%	4,412.8		

Zonal Lumen Summary

Zone	Lumens	% Lamp	% Luminaire
0-30	4,792.1	109.6%	100%
0-40	4,792.1	109.6%	100%
0-60	4,792.1	109.6%	100%
60-90	0	0%	0%
70-100	0	0%	0%
90-120	0	0%	0%
0-90	4,792.1	109.6%	100%
90-180	0	0%	0%
0-180	4,792.1	109.6%	100%

Lumens Per Zone

Zone	Lumens	% Total	Zone	Lumens	% Total
0-10	4,783.4	99.8%	90-100	0	0%
10-20	8.7	0.2%	100-110	0	0%
20-30	0	0.0%	110-120	0	0%
30-40	0	0.0%	120-130	0	0%
40-50	0	0.0%	130-140	0	0%
50-60	0	0.0%	140-150	0	0%
60-70	0	0.0%	150-160	0	0%
70-80	0	0.0%	160-170	0	0%
80-90	0	0.0%	170-180	0	0%

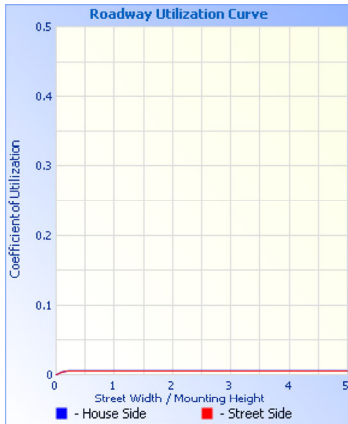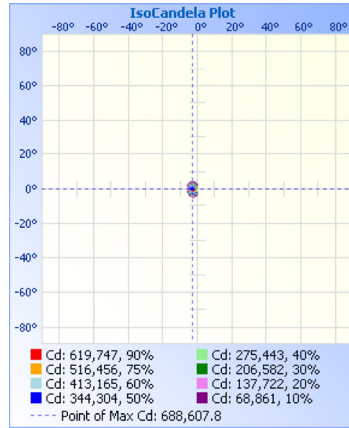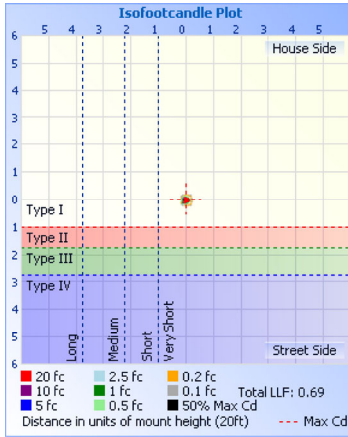

	Illuminance at a Distance		
	Center Beam fc	Beam Width	
17.0ft	201 fc	1.5 ft	1.3 ft
34.0ft	50.2 fc	3.1 ft	2.6 ft
51.0ft	22.3 fc	4.6 ft	3.9 ft
68.0ft	12.5 fc	6.2 ft	5.1 ft
85.0ft	8.03 fc	7.7 ft	6.4 ft
102.0ft	5.58 fc	9.2 ft	7.7 ft

■ Vert. Spread: 5.2°
■ Horiz. Spread: 4.3°

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance: 20%

RCC %:	80				70				50				30				10				0
RW %:	20	50	30	0	20	50	30	0	50	30	20	0	50	30	20	0	50	30	20	0	0
RCR: 0	1.30	1.30	1.30	1.30	1.27	1.27	1.27	1.10	1.22	1.22	1.22	1.17	1.17	1.17	1.17	1.12	1.12	1.12	1.12	1.10	1.10
1	1.28	1.26	1.25	1.24	1.25	1.24	1.23	1.10	1.20	1.19	1.18	1.16	1.16	1.15	1.15	1.12	1.12	1.12	1.11	1.10	1.10
2	1.26	1.23	1.21	1.19	1.24	1.21	1.20	1.10	1.18	1.17	1.16	1.15	1.15	1.14	1.13	1.12	1.12	1.12	1.11	1.10	1.10
3	1.24	1.21	1.18	1.17	1.22	1.20	1.17	1.10	1.17	1.15	1.14	1.15	1.15	1.13	1.12	1.13	1.13	1.12	1.11	1.10	1.10
4	1.22	1.19	1.17	1.15	1.21	1.18	1.16	1.10	1.16	1.14	1.13	1.14	1.14	1.13	1.12	1.13	1.13	1.11	1.10	1.10	1.10
5	1.21	1.18	1.15	1.13	1.20	1.17	1.15	1.10	1.15	1.13	1.12	1.14	1.14	1.12	1.11	1.13	1.13	1.11	1.10	1.10	1.10
6	1.20	1.17	1.14	1.12	1.19	1.16	1.14	1.10	1.15	1.13	1.11	1.14	1.14	1.12	1.11	1.13	1.13	1.11	1.10	1.10	1.10
7	1.19	1.16	1.13	1.12	1.19	1.15	1.13	1.10	1.14	1.12	1.11	1.13	1.13	1.12	1.11	1.13	1.13	1.11	1.10	1.10	1.10
8	1.19	1.15	1.13	1.11	1.18	1.15	1.13	1.10	1.14	1.12	1.11	1.13	1.13	1.12	1.10	1.12	1.12	1.11	1.10	1.10	1.10
9	1.18	1.15	1.12	1.11	1.17	1.14	1.12	1.10	1.14	1.12	1.11	1.13	1.13	1.11	1.10	1.12	1.12	1.11	1.10	1.09	1.09
10	1.17	1.14	1.12	1.11	1.17	1.14	1.12	1.10	1.13	1.12	1.10	1.13	1.13	1.11	1.10	1.12	1.12	1.11	1.10	1.09	1.09

Photometrics Pro - Evaluation Version**Luminaire Report Summary**

IESNA:LM-63-2002
[ISSUEDATE] 2020-01-30 14:33:36.191
[LAMP]
[LAMPFCAT]
[LUMCAT] 7683
[LUMINAIRE] impression FR10 BAR
[MANUFAC] GLP German Light Products GmbH
[TEST] 2020-01-30-2
[TESTLAB] GLP Light Lab
FILE: CANDELA MULTIPLIER: 1
FILE: VERTICAL ANGLES: 325, HORIZONTAL ANGLES: 327
FILE: COORDINATE SYSTEM: TYPE B
FILE: UNIT OF MEASURE: METRIC
FILE: BALLAST FACTOR: 1

Photometrics Pro 1.3.29 - (Evaluation Version) copyright 2003-2020 by jSolutions, Inc.
Reported data calculated from manufacturer's data file, based on IES recommended methods.